

# EOD Power Cartridge Kit



## CT-13, CT26 & CT39



The Cartridge kit CT-13, CT-26 and CT-39 are used with our EAD-13, EAD-26 and EAD-39 Disruptors which are ½ inch, 1inch and 1½ inch bore disruptors. These cartridges are also be used with the legacy Needle, Pigstick and Hotrod disruptors respectively. In a kit, with Cartridge injector, the consumables of firing the disruptor are also provided. These include a Piston and a Closure cap.


These carts have aluminum alloy body, with propellant as its main filling and having an electric primer. The primer does not contain any corrosive or toxic materials and is reliable for log life.





## Packing

In packing, the cartridges are first secured in an aluminum container and then packed in sealed ammunition container secured by the polystyrene slots. One environmentally sealed ammunition box can house qty 40 or 20 of the CT-26 Cartridge sets. The packing meets the requirements of transportation as per the UN HD 1.4S.

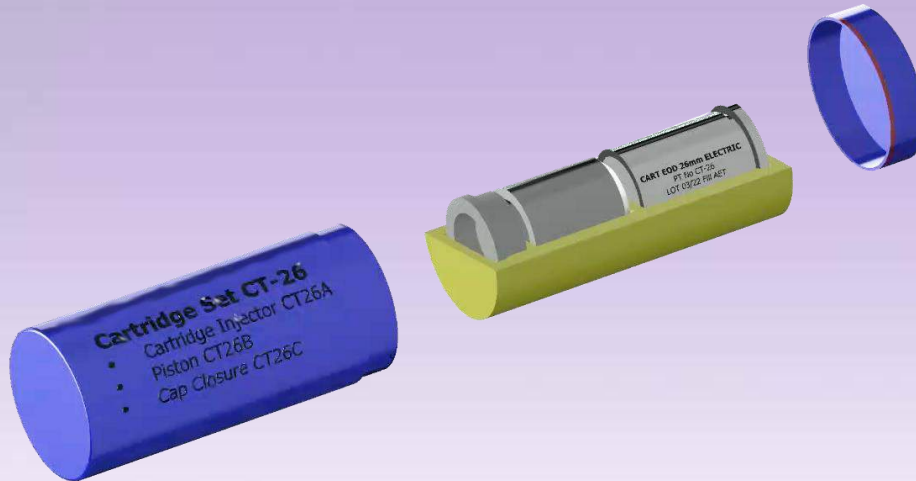

### Important specifications

Parameter	Cartridge Injector		
Cartridge type	CT13	CT26	CT39
Diameter	13mm	26 mm	38.5mm
NEQ	3 g	6 grams	8 grams
No fire current	0.4A	0.4A	0.4A
Used with disruptor	EAD-13 (Needle)	EAD-26 (Pigstick)	EAD-39 (Hotrod)
Size Piston	CT13B (Lx D) 26mm x Ø 14 mm	CT26B (Lx D) 32mm x Ø 27mm	CT39B (Lx D) 34mm x Ø 39 mm
Size Cap Closure	CT13C (Lx D) 6mm x Ø 14 mm	CT26C (Lx D) 8mm x Ø 29 mm	CT39C (Lx D) 9mm x Ø 40 mm
UN No	0323		
Packing	Cartridges are first secured in individual packing and then packed in M2A1		